
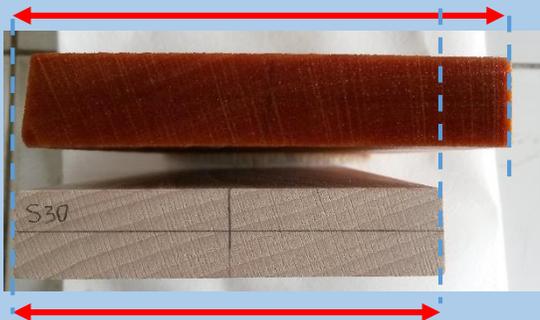


Thermo-densification of **beech wood** pre-treated with furfurylation

DAMAY Jérémie¹, SEJATI Prabu Satria^{1,2}, ETIENNEY Bertille¹, OBOUNOU AKONG Firmin¹, DWIANTO Wahyu², GERARDIN Philippe¹

1. WHY BEECH?

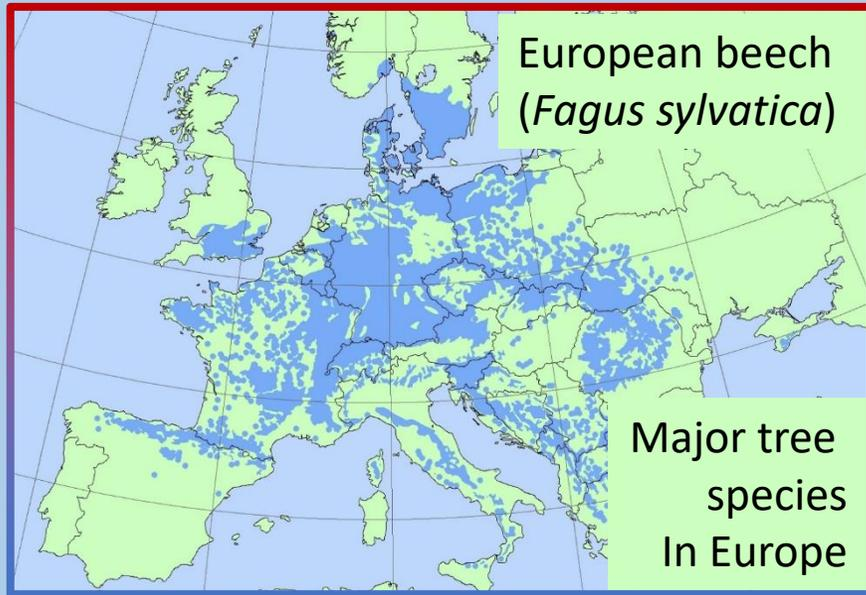

Underexploited!

2. WHAT METHOD?

A. Furfurylation



+ Dim. Stability
Durability

- Mechanical
Properties

COMBINATION

B. Densification



+ Mechanical
Properties

- Dim. Stability/
Set Recovery

3. RESULT?



POSTER NUMERO:

C14